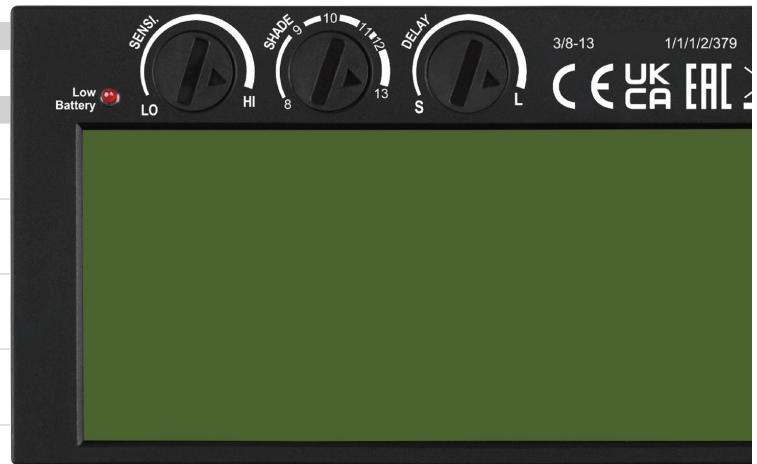


**EP386 FORGE FLEX ADF CARTRIDGE 8-13 (copy)**
**DESCRIPTION**

- Replacement ADF for Universal Forge Flex Hood.

**Specifications/Technical Data**

Optical Class	1/1/1/2
Viewing Area	92.1 x 35.1 mm (3.63" x 1.38")
Cartridge Size	108 x 50.8 x 8 mm (4.25" x 2.00" x 0.31")
Arc Sensors	2
Light State	DIN 3
Dark State	DIN 8 - 13
Shade Control	Internal, variable shade
Power On/off	Fully Automatic
Sensitivity Control	Low – High, by infinite dial knob
Power Supply	Solar cell. Battery replaceable, 2 x CR1025 lithium battery
Low battery Alarm	Red internal indicator light
Switching Time	1/10,000 s. from Light to Dark
Dark to Light	0.1~1.0 s by infinitely dial knob
Low AMP TIG Rating	≥ 5 amps (DC); ≥ 5 amps (AC)
Operating Temp	-10°C ~ +55°C (14°F ~ 131°F)
Mask Material	Black grain leather
Total Weight	363g
Application Range	Stick Welding (SMAW); TIG DC&AC; TIG Pulse DC; TIG Pulse AC; MIG/MAG/CO <sub>2</sub> ; MIG/MAG Pulse; Plasma Arc Cutting (PAC); Plasma Arc Welding (PAW); Air Carbon Arc Cutting (CAC-A)
Approvals	CE, EN 166, DIN 58214, UKCA, EAC


**COLOUR AVAILABILITY**

■ BLACK

**SIZE AVAILABILITY**

ONE SIZE - ONE SIZE